



Demonstration movie

## KAMINO



La stufa infrarossi a gas KAMINO con elementi in ceramica è la soluzione ideale per riscaldare grandi ambienti in poco tempo, fino a 120 m<sup>2</sup>, garantendo elevati standard di sicurezza nella gestione del gas.

I due sistemi di sicurezza spengono la stufa se vengono rilevate percentuali di anidride carbonica troppo elevate (>1.5%) e se la fiamma si spegne accidentalmente.

I 3 livelli di potenza garantiscono la massima versatilità di utilizzo

La solida struttura verniciata, con rotelle alla base può, contenere una bombola di GPL da 15kg e la rende facile da spostare da un ambiente ad un altro.

**Regolatore del gas MADE IN ITALY, approvato IMQ, tubo Gas MADE IN ITALY approvato IMQ conforme a norma UNI 7140**

**Kamino ha le approvazioni SGS**



**SGS**



The infrared gas heater KAMINO with ceramic elements is the ideal solution to heat large areas in a short time (up to 120 m<sup>2</sup>), ensuring high standards of safety in the management of the gas.

The two safety systems switch off the gas heater if found too high percentage of carbon dioxide (> 1.5%) and if the flame goes out accidentally.

The 3 power levels guarantee maximum versatility of use

The solid painted, with wheels at the base, contains a LPG cylinder 15kg and makes it easy to move from one environment to another.

**Gas regulator MADE IN ITALY, approved IMQ, Gas MADE IN ITALY approved pipe IMQ conforming to UNI 7140**

**Kamino has SGS approvals**




**SGS**



| GIFT BOX        |     |     | MASTER CARTON   |     |     | PALLET | CONTAINER |     |      |
|-----------------|-----|-----|-----------------|-----|-----|--------|-----------|-----|------|
| Size (mm)       | Kg  | Pcs | Size (mm)       | Kg  | Pcs |        | 20        | 40  | 40HQ |
| 455 x 385 x 755 | 9.3 | 1   | 455 x 385 x 755 | 9.3 | 18  | 227    | 440       | 540 |      |



8 008523 010614

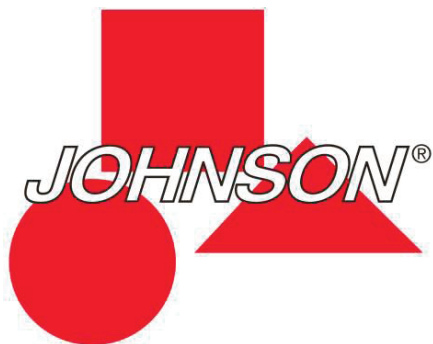

## SCHEDA PRODOTTO PRODUCT DETAILS

### KAMINO

|          |               |        |         |
|----------|---------------|--------|---------|
| FAMIGLIA | RISCALDAMENTO | FAMILY | HEATING |
| CODICE   | KAM           | CODE   | KAM     |
| COD. EAN | 8008523010614 |        |         |

#### CARATTERISTICHE

Potenza 1500 - 2800 - 4100 W  
Maniglie per trasporto  
Superficie riscaldabile: 120 m<sup>2</sup>  
Accensione piezoelettrica  
Griglia di protezione  
3 piastre ceramiche  
Consumo massimo: 298<sup>g</sup>/<sub>h</sub>  
Bombola utilizzabile: capacità 15 kg  
Spegnimento di sicurezza in caso di spegnimento  
accidentale della fiamma  
Spegnimento di sicurezza in caso di troppa CO<sub>2</sub>  
nell'ambiente; CO<sub>2</sub> > 1.5%  
Regolatore gas costruito in Italia e certificato IMQ  
Apparecchio Approvato SGS  
Alimentazione: Gas GPL

|                        |                    |
|------------------------|--------------------|
| Dimensioni prodotto:   | 420 x 352 x 730 mm |
| Dimensioni imballo:    | 455 x 385 x 755 mm |
| Peso imballo:          | 9.3 Kg             |
| Pezzi x master         | 1 pz               |
| Dimensioni master:     | 455 x 380 x 755 mm |
| Peso master:           | 9.3 Kg             |
| Pezzi x pallet:        | 18                 |
| Colli x strato:        |                    |
| Strati:                |                    |
| Altezza:               |                    |
| Peso:                  |                    |
| Container 20:          | 227 pz             |
| Container 40:          | 440 pz             |
| Container 40 HQ :      | 540 pz             |
| Codice certificazione: | PO-E03             |

#### FEATURES

Power 1400 - 2800 - 4100 W  
Carrying Handles  
Heatable area: 120 m<sup>2</sup>  
Piezoelectric ignition  
Protection grid  
3 ceramic plates  
Max consumption: 298<sup>g</sup>/<sub>h</sub>  
Cylinder used: capacity 15 kg  
Safety shutdown in case of accidental extinguishing of the  
flame  
Safety shutdown in case of too much CO<sub>2</sub> in the  
environment ;CO<sub>2</sub> > 1.5%  
Gas regulator Made in Italy and certified IMQ  
SGS Approved equipment  
Gas supplies: LPG

|                     |                    |
|---------------------|--------------------|
| Product dimensions: | 420 x 352 x 730 mm |
| Package dimensions: | 455 x 380 x 755 mm |
| Packaging weight:   | 9.3 kg             |
| Master pieces:      | 1 pc               |
| Master size:        | 455 x 380 x 755 mm |
| Master Weight:      | 9.3 Kg             |
| Pieces for pallet:  | 18                 |
| Master for layer:   |                    |
| Layers:             |                    |
| Height:             |                    |
| Weight:             |                    |
| Container 20:       | 227 pcs            |
| Container 40:       | 440 pcs            |
| Container 40 HQ:    | 540 pcs            |
| Certification Code: | PO-E03             |

